


## ▲ CH系列命名，外形及安装尺寸表

CH28-400-50-B C

- A单相110V
- S三相220V 380V
- C单相220V
- 带刹车
- 减速比1:50
- 电机功率400W
- 输出轴轴径  $\phi 28$
- CH卧式减速机

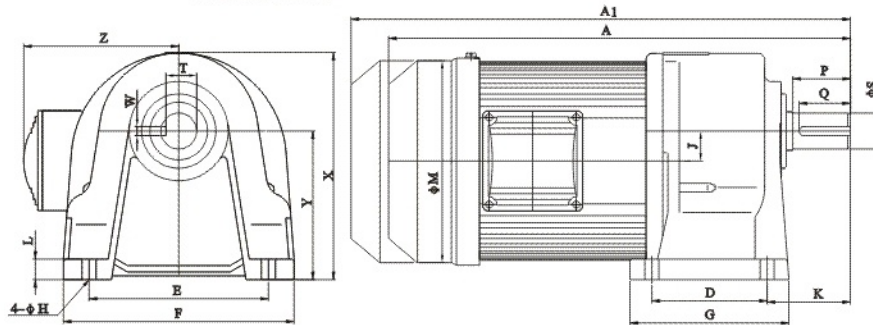

功率	减速比	机型	A1	A	D	E	F	G	H	L	J	K	M	X	Y	Z	输出轴				
																	P	Q	S	T	W
100W	3-50	18	264	253	40	110	135	65	11	11	15.98	52	127	128	85	106	30	27	18	15	5
	60-200	22	295	284	65	130	158	93	12	12	17.66	60	127	153	97.5	106	40	35	22	18	7
200W	3-25	18	294	283	40	110	135	65	11	11	15.98	52	127	128	85	106	30	27	18	15	5
	30-100	22	325	314	65	130	158	93	12	12	17.66	60	127	153	97.5	106	40	35	22	18	7
	120-200	28	350	339	90	140	180	124	12	16	23.11	65	127	177	116	106	45	40	28	24	7
400W	3-25	22	325	314	65	130	158	93	12	12	17.66	60	127	153	97.5	106	40	35	22	18	7
	30-90	28	371	360	90	140	180	124	12	16	23.11	65	160	177	116	121	45	40	28	24	7
	100-200	32	392	387	130	170	213	160	13	20	30.22	76	160	204	138.5	121	55	50	32	27	10
750W	3-25	28	391	380	90	140	180	124	12	16	23.11	65	160	177	116	121	45	40	28	24	7
	30-100	32	412	407	130	170	213	160	13	20	30.22	76	160	204	138.5	121	55	50	32	27	10
	120-200	40	445	445	150	210	260	190	15	21	37.96	85	160	250	160	121	65	60	40	35	10
1500W	3-30	32	442	442	130	170	213	160	13	20	30.22	76	193	204	138.5	138	55	50	32	27	10
	40-100	40	473	473	150	210	260	190	15	21	37.96	85	193	250	160	138	65	60	40	35	10
	120-200	50	555	555	170	265	330	230	19	26	51	118	193	320	202	138	80	75	50	44.5	14
2200W	3-10	32	462	462	130	170	213	160	13	20	30.22	76	193	204	138.5	138	55	50	32	27	10
	15-60	40	493	493	150	210	260	190	15	21	37.96	85	193	250	160	138	65	60	40	35	10
	80-100	50	580	580	170	265	330	230	19	26	51	118	193	320	202	138	80	75	50	44.5	14
3700W	3-20	40	525	525	150	210	260	190	15	21	37.96	85	230	250	160	170	65	60	40	35	10
	25-60	50	595	595	170	265	330	230	19	26	51	118	230	320	202	170	80	75	50	44.5	14