




▲ CV系列命名，外形及安装尺寸表

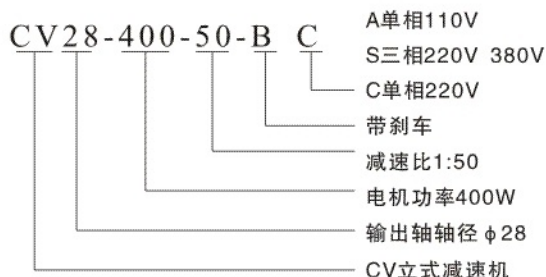


CV22-50外形图

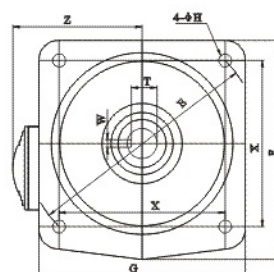

CV18外形图

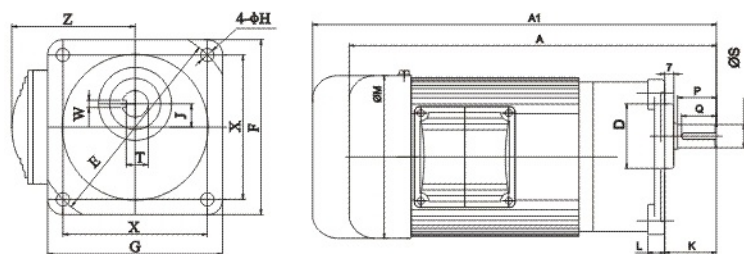

CV22-50外形图

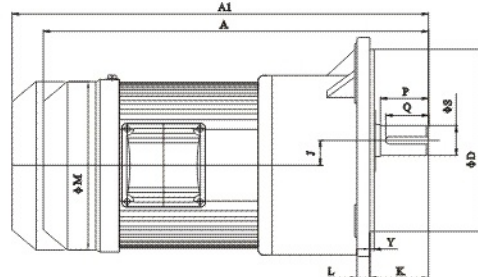

功率	减速比	机型	A1	A	D	E	F	G	H	L	J	K	M	X	Y	Z	输出轴				
																	P	Q	S	T	W
100W	3-50	18	264	253	50	140	120	120	9	12	15.98	40	127	99	—	106	30	27	18	15	5
	60-200	22	295	284	148	185	173	163	11	12	17.66	48	127	131	3	106	40	35	22	18	7
200W	3-25	18	294	283	50	140	120	120	9	12	15.98	40	127	99	—	106	30	27	18	15	5
	30-100	22	325	314	148	185	173	163	11	12	17.66	48	127	131	3	106	40	35	22	18	7
	120-200	28	350	339	170	220	205	193	12	13	23.11	55	127	155.5	4	106	45	40	28	24	7
400W	3-25	22	325	314	148	185	173	163	11	12	17.66	48	127	131	3	106	40	35	22	18	7
	30-90	28	371	360	170	220	205	193	12	13	23.11	55	160	155.5	4	121	45	40	28	24	7
	100-200	32	392	387	185	254.5	238	216	13	16	30.22	70	160	180	4	121	55	50	32	27	10
750W	3-25	28	391	380	170	220	205	193	12	13	23.11	55	160	155.5	4	121	45	40	28	24	7
	30-100	32	412	407	185	254.5	238	216	13	16	30.22	70	160	180	4	121	55	50	32	27	10
	120-200	40	445	445	230	310	295	270	15	21	37.96	81	160	219	5	121	65	60	40	35	10
1500W	3-30	32	442	442	185	254.5	238	216	13	16	30.22	70	193	180	4	138	55	50	32	27	10
	40-100	40	473	473	230	310	295	270	15	21	37.96	81	193	219	5	138	65	60	40	35	10
	120-200	50	555	555	280	390	360	335	19	21	51	90.5	193	276	5	138	80	75	50	44.5	14
2200W	3-10	32	462	462	185	254.5	238	216	13	16	30.22	70	193	180	4	138	55	50	32	27	10
	15-60	40	493	493	230	310	295	270	15	21	37.96	81	193	219	5	138	65	60	40	35	10
	80-100	50	580	580	280	390	360	335	19	21	51	90.5	193	276	5	138	80	75	50	44.5	14
3700W	3-20	40	525	525	230	310	295	270	15	21	37.96	81	230	219	5	170	65	60	40	35	10
	25-60	50	595	595	280	390	360	335	19	21	51	90.5	230	276	5	170	80	75	50	44.5	14